


Performance Curves

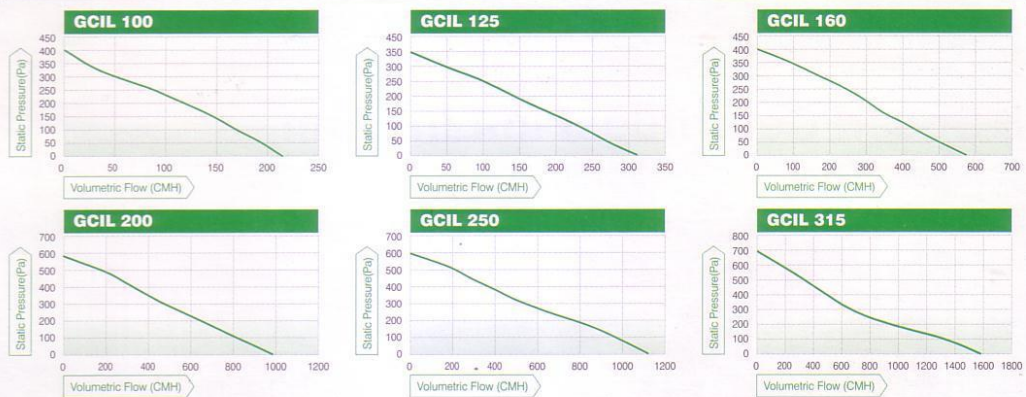

Specification

Model	GCIL 100	GCIL 125	GCIL 160	GCIL 200	GCIL 250	GCIL 315
Speed	High	High	High	High	High	High
Volt / Phase / Hz	240 / 1 / 50	240 / 1 / 50	240 / 1 / 50	240 / 1 / 50	240 / 1 / 50	240 / 1 / 50
Max Power Input (W)	68	72	130	187	214	288
Air Flow (CMH)	214	312	577	975	1137	1573
Amps (A)	0.28	0.3	0.54	0.74	0.85	1.14
RPM	2729	2684	2573	2376	2376	2317
Sound Power dB(A)	78.0	77.5	80.5	79.5	78.5	80.0
Sound Pressure dB(A) at 3m	57.0	56.5	59.5	58.5	57.5	59.0


*Speed(RPM) shown is nominal. Performance is based on actual speed of test.

*LpA-dBA levels are not licensed by AMCA International.

*Performance certified is for installation type D- Ducted inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

*The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet LwA sound power levels for installation type D ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

Dimension (mm)

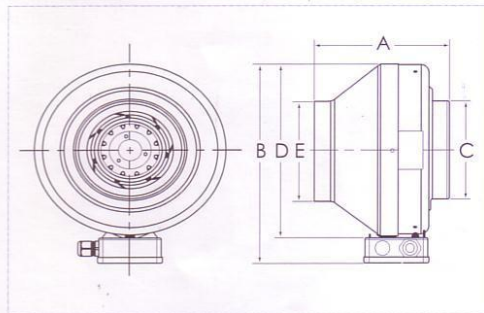

MODEL	A	B	C	D	E	WEIGHT (Kg)
GCIL 100	203.5	279.0	100.0	236.5	100.0	3.8
GCIL 125	193.0	279.0	125.0	236.5	125.0	3.8
GCIL 160	195.0	323.0	160.0	278.0	160.0	4.5
GCIL 200	234.5	378.0	200.0	333.0	200.0	6.6
GCIL 250	211.0	377.5	250.0	333.0	250.0	6.8
GCIL 315	265.0	446.0	385.0	401.5	315.0	8.4

Specifications subject to changes without prior notice.

Accessories (Optional)

GAC Series	GA4C	GA6C
	A 155	202
	B 15	18
	C 100	150
	D 98	118
GACG Series	GA4CG	GA6CG
	A 155	202
	B 25.5	25.5
	C 100	150
	D 66	66
GAT Series	GA6T	GA8T
	A 290	324
	B 264	296
	C 248	278
	D 92	88
	E 18	18
	F 145	190