


Side Channel Blower



DG DARGANG

APEX DARGANG MACHINERY CORPORATION

Application For Vacuum / Compressor

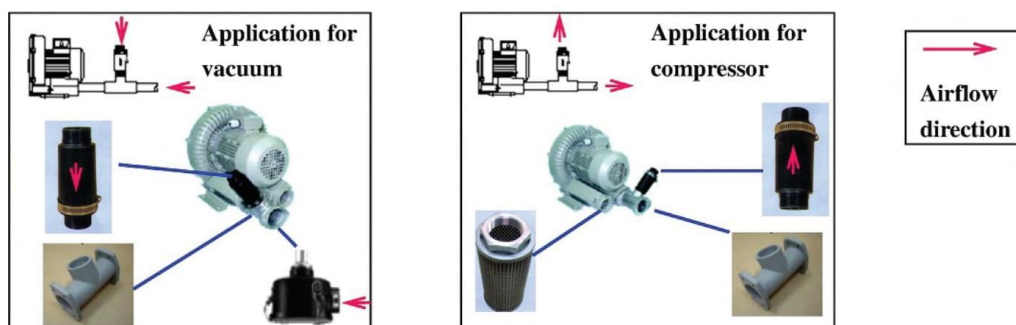

Single Phase AC IP55 50Hz

Model	Curve No.	Frequency (Hz)	Output (kW)	Voltage (V)	Current (A)	Vacuum / Compressor (mbar)	Max Airflow (m³/min)	Noise (dB)A	Weight (Kg)
HB-129-S	D1	50	0.18	200-240	1.25	50	1.0	52	6.5
HB-229-S	D2	50	0.4	200-240	2.90	110	1.5	58	11.5
HB-229W-S	D3	50	0.4	200-240	2.90	110	1.5	58	12
HB-329-S	D4	50	0.75	200-240	5.80	140	2.6	63	16
HB-329W-S	D5	50	0.75	200-240	5.80	140	2.5	63	16.5
HB-429-S	D8	50	1.5	200-240	10.0	180	3.7	70	26
HB-429W-S	D9	50	1.5	200-240	10.0	180	3.7	70	26.5
HB-2308-S	D10	50	0.75	200-240	4.50	180	1.6	60	17.5
HB-3315-S	D11	50	1.5	200-240	10.0	240	2.6	66	28.5

Three Phase AC IP55 50Hz



Model	Curve No.	Frequency (Hz)	Output (kW)	Voltage (V)	Current (A)	Static pressure Vacuum / Compressor (mbar)	Max Airflow (m³/min)	Noise (dB)A	Weight (Kg)
HB-129	D12	50	0.18	200-240 △ /345-415Y	1.20△/0.69Y	50/60	1	52	6.5
HB-229	D13	50	0.4	200-240 △ /345-415Y	2.20△/1.30Y	110/130	1.5	58	10.5
HB-329	D15	50	0.75	200-240 △ /345-415Y	3.70△/2.14Y	140/140	2.6	63	14
HB-339	D19	50	1.3	200-240 △ /345-415Y	4.60△/2.65Y	175/200	2.6	63	16
HB-429	D22	50	1.75	200-240 △ /345-415Y	6.70△/3.90Y	210/220	3.7	70	23
HB-439	D25	50	2.2	200-240 △ /345-415Y	7.80△/4.50Y	220/270	3.7	70	26
HB-529	D26	50	2.2	200-240 △ /345-415Y	9.70△/5.60Y	220/210	5.5	72	32
HB-629	D29	50	3.4	200-240 △ /345-415Y	12.5△/7.20Y	255/270	5.5	72	34
HB-639	D31	50	4	200-240 △ /345-415Y	14.3△/8.20Y	270/320	5.5	72	37
HB-729	D32	50	5.5	200-240 △ /345-415Y	25.3△/14.6Y	270/290	9.5	74	77
HB-829	D33	50	7.5	200-240 △ /345-415Y	31.5△/18.2Y	295/390	9.5	74	88
HB-919	D34	50	9	200-240 △ /345-415Y	36.0△/20.8Y	200/190	18.9	76	100
HB-929	D35	50	13	200-240 △ /345-415Y	46.8△/27.0Y	290/270	18.9	76	112
HB-939	D36	50	20	200-240 △ /345-415Y	66.7△/38.6Y	350/440	18.9	76	159
HB-2308	D37	50	0.75	200-240 △ /345-415Y	3.70△/2.14Y	200/240	1.6	60	17
HB-3319	D38	50	1.75	200-240 △ /345-415Y	6.70△/3.90Y	275/300	2.6	66	25
HB-3326	D39	50	2.2	200-240 △ /345-415Y	7.80△/4.50Y	320/390	2.6	66	28
HB-4337	D40	50	3.4	200-240 △ /345-415Y	12.5△/7.20Y	345/410	3.7	74	40
HB-4346	D41	50	4	200-240 △ /345-415Y	14.3△/8.20Y	355/460	3.7	74	43
HB-6346	D42	50	4	200-240 △ /345-415Y	14.3△/8.20Y	350/350	5.5	75	55
HB-6355	D43	50	5.5	200-240 △ /345-415Y	21.6△/12.5Y	410/500	5.5	75	72
HB-6375	D44	50	7.5	200-240 △ /345-415Y	31.5△/18.2Y	420/580	5.5	75	82
HB-6455	D45	50	5.5	200-240 △ /345-415Y	25.3△/14.6Y	200/220	7.9	75	72
HB-6475	D46	50	7.5	200-240 △ /345-415Y	31.5△/18.2Y	240/275	7.9	75	82
HB-8310	D47	50	7.5	200-240 △ /345-415Y	31.5△/18.2Y	350/350	9.5	76	112
HB-8315	D48	50	13	200-240 △ /345-415Y	46.8△/27.0Y	430/600	9.5	76	142
HB-8320	D49	50	20	200-240 △ /345-415Y	66.7△/38.6Y	450/700	9.6	76	160
HB-8410	D50	50	7.5	200-240 △ /345-415Y	31.5△/18.2Y	180/145	14.2	76	110
HB-8415	D51	50	13	200-240 △ /345-415Y	46.8△/27.0Y	250/250	14.2	76	140

Remark:

1. Information above is for reference, product only when different.
2. We reserve the right to change the design without notice.
3. Should you require any further information or assistance, please do not hesitate to contact us or distributors.