


HPA SERIES

Technical Data

Model Number HPA...	Fan Speed, rev/sec	Avg. dB(A) @ 3m	220-240V/1Ph/50Hz Watts	FLC Amps	SC Amps	App. Wt. kg
200/2-1A	38	41	55	0.26	0.80	2.5
250/2-1A	40	51	80	0.40	1.20	3.0
315/2-1A	38	51	145	0.66	2.00	3.3
250/4-1A	23	46	50	0.23	0.70	3.0
315/4-1A	22	49	75	0.35	1.10	3.3
350/4-1A	23	53	140	0.65	2.00	4.9
400/4-1A	23	59	180	0.82	2.5	7.2
450/4-1A	22	59	250	1.20	3.6	7.2
500/4-1A	21	63	420	1.95	5.9	9.5
560/4-1A	21	66	550	2.55	7.7	10.5
400/6-1A	15	49	110	0.50	1.50	7.2
450/6-1A	15	51	150	0.70	2.10	7.2
500/6-1A	15	59	230	1.15	3.50	9.5
560/6-1A	15	61	330	1.70	5.10	10.5
630/6-1A	15	66	520	2.50	7.50	15.0
500/4-3A	21	63	450	0.90	2.70	9.5
560/4-3A	21	75	600	1.20	3.60	10.5
630/4-3A	22	69	800	1.60	4.80	15.0
500/6-3A	15	59	230	0.55	1.7	9.5
560/6-3A	15	61	330	0.90	2.7	10.5
630/6-3A	15	66	550	1.60	4.8	15.0
710/6-3A	15	71	900	1.90	5.7	25.0

Dimensions

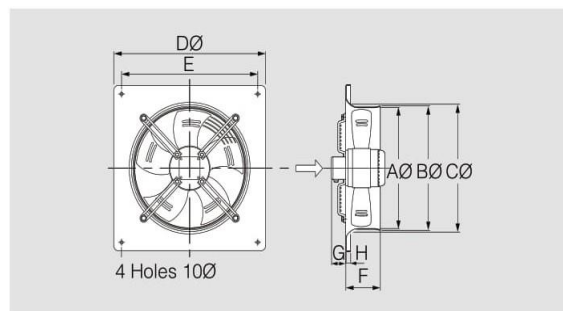

Model Number HPA...	Dimensions, mm							
	AØ	BØ	CØ	DØ	E	F	G	H
200/*-**A	200	210	215	312	260	52	60	15
250/*-**A	250	260	265	370	320	90	60	15
315/*-**A	315	325	360	430	380	90	60	15
350/*-**A	350	360	395	485	435	90	60	15
400/*-**A	400	410	450	540	490	110	60	15
450/*-**A	450	460	500	575	535	110	60	15
500/*-**A	500	510	560	655	615	115	60	15
560/*-**A	560	575	625	725	670	115	60	15
630/*-**A	630	645	705	805	750	125	60	20
710/*-**A	710	725	765	850	810	130	135	27

* Add 2, 4 or 6 for number of poles

** Add 1 or 3 for electrical phase